


Telescopic Crawler Crane Grue télescopique sur chenilles

LTR 1060

Technical Data
Caractéristiques techniques


New • Nouveau

**Preliminary
Préliminaire**

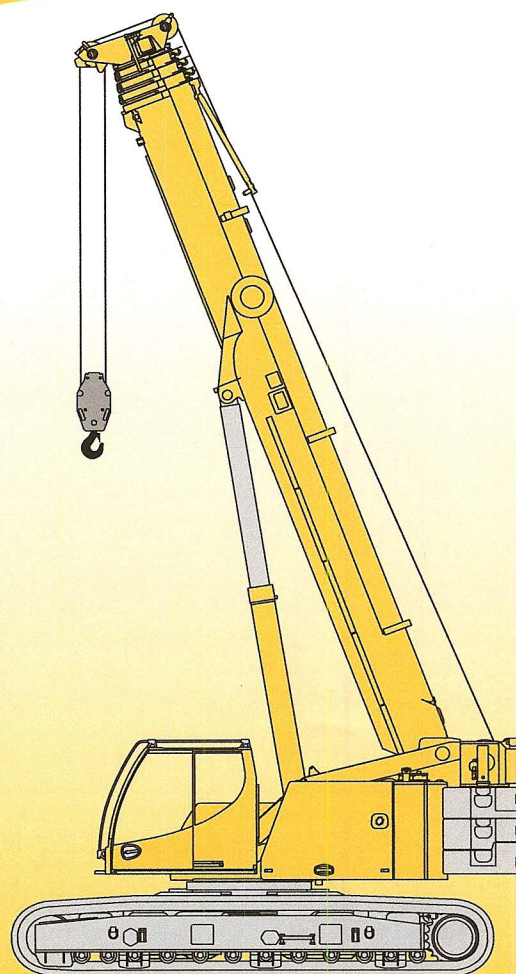

LIEBHERR

Dimensions Encombrement

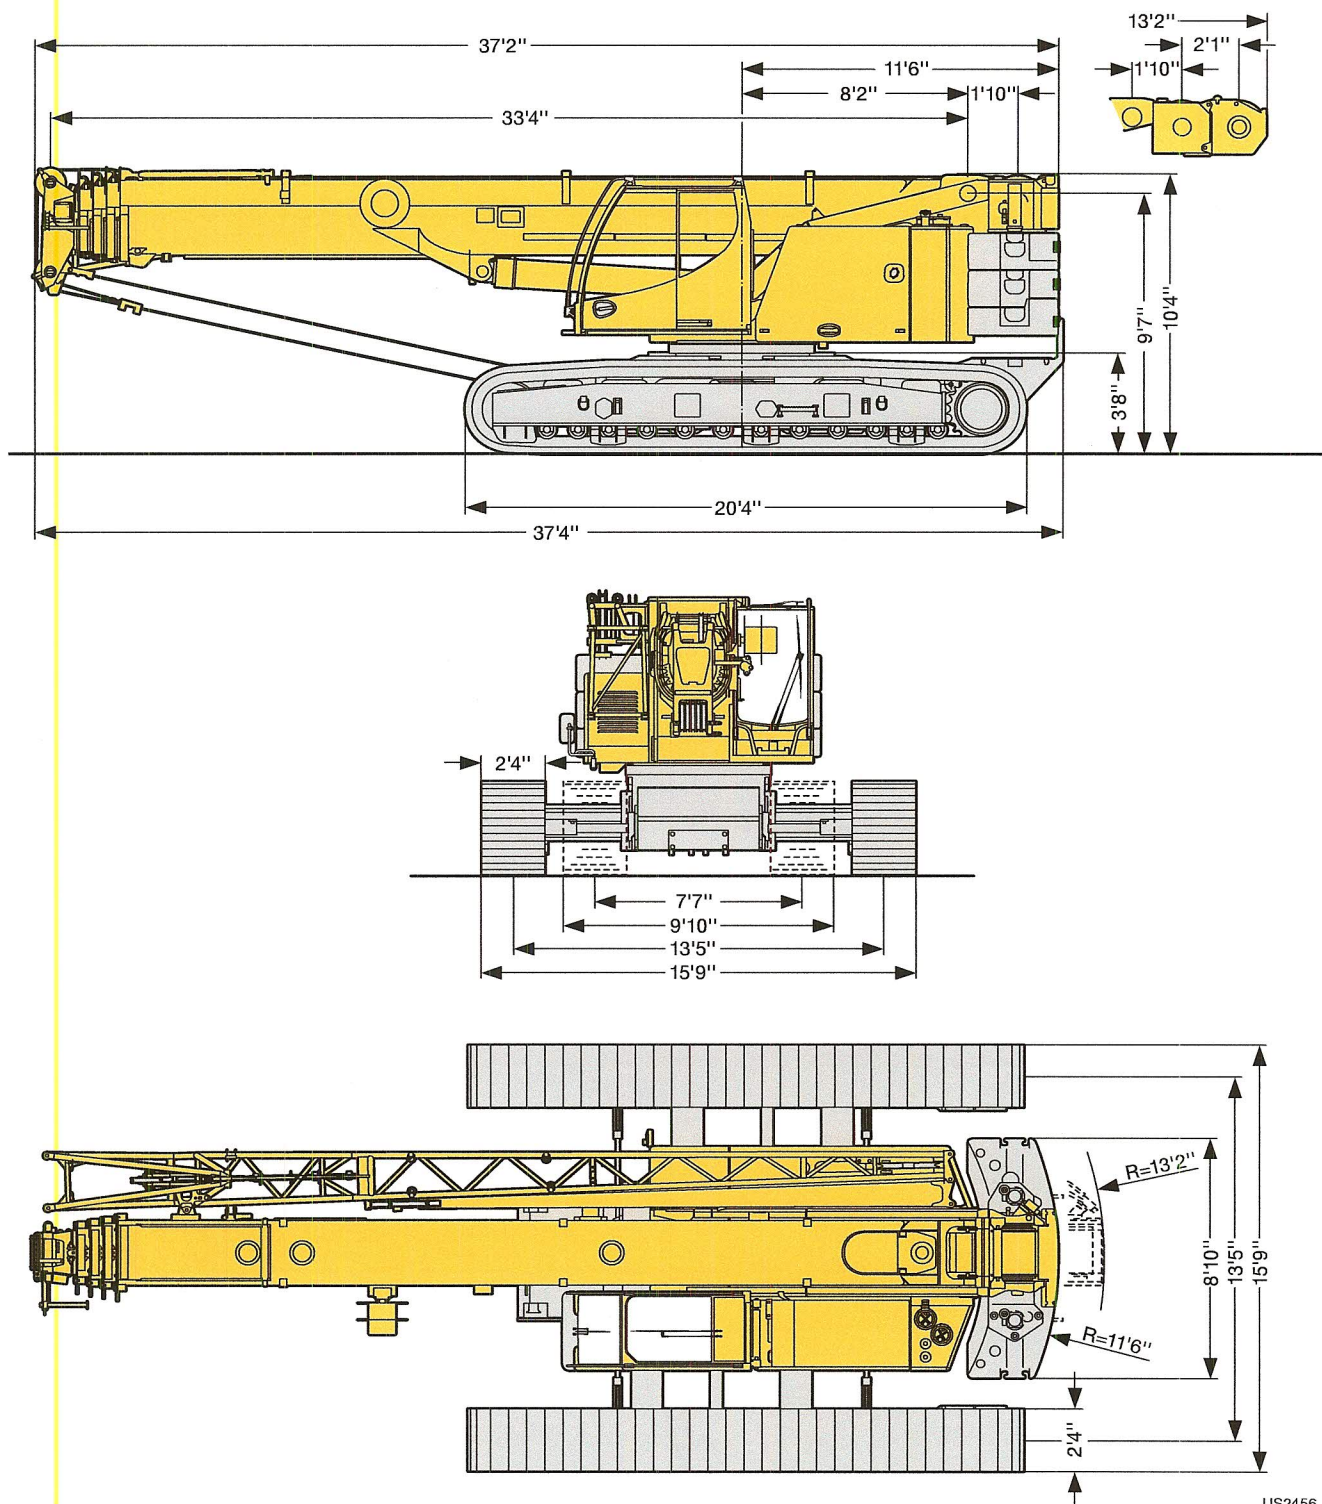

US2456

Lifting capacities Forces de levage


T

33 – 131 ft 360° 34400 lbs 22050 lbs 75% Preliminary Préliminaire											
ft	33 ft	45 ft	56 ft	67 ft	78 ft	90 ft	101 ft	112 ft	123 ft	131 ft	ft
10	93.3	93.1	93.1	84.4	66.6	50.4					10
11	93.3	93.1	91.9	84.2	66.7	51					11
12	93.3	93.1	90.6	83.7	66.7	51.6					12
13	93.3	92.1	86.7	82.1	66.7	52.1	41.5				13
14	92.2	89.3	82.2	78	66.7	52.5	41.8				14
15	87.3	84.4	78.5	73.5	66.7	52.7	42.2	32.5			15
16	82.5	80	75	70	66.7	52.5	42.3	32.7			16
17	79.1	76.3	71.9	68.2	65.3	51.7	41.9	32.9			17
18	75.7	74.1	70.2	66.3	63.4	50.5	41.5	33.1	25.8		18
19	72.3	71.5	68.1	64.3	61.1	49.2	41	33	25.8		19
20	67.8	68.3	64.3	61.9	57.7	48	40.2	32.9	25.9	22.1	20
22	58.2	59.2	57.3	55.3	52	45.6	38.5	32.1	25.8	22.2	22
24	50.5	51.8	51.4	50	47	43.2	36.9	31.3	25.4	22.2	24
26		46.1	46.8	45.5	42.8	40.4	35.3	30.3	24.9	21.9	26
28		41.1	41.9	41.6	39.3	37	33.8	29.4	24.3	21.5	28
30		37.1	37.7	37.7	36.3	34.4	32.2	28.4	23.6	21.1	30
32		33.7	34.4	34.3	33.5	32.3	30.4	27.4	23	20.7	32
34		30.8	31.4	31.3	30.9	30.4	28.5	26.4	22.3	20.1	34
36		28.3	28.9	28.8	28.4	28.7	26.5	25.5	21.7	19.4	36
38			26.7	26.6	26.3	26.8	24.8	24.3	21.1	18.8	38
40			24.8	24.8	25	24.9	23.5	23	20.4	18.3	40
45			20.9	20.7	21.4	20.9	20.7	19.9	18.8	17	45
50				18.1	18.3	17.9	17.9	17.4	17.3	15.9	50
55				16.1	16	15.5	15.8	15.7	15.3	14.9	55
60					14	14.1	13.8	13.7	13.4	13.4	60
65					12.4	12.6	12.4	12.2	11.8	11.8	65
70					11.2	11.3	11	10.8	10.4	10.5	70
75						10.1	9.7	9.5	9.1	9.1	75
80						9	8.7	8.5	8.2	8.2	80
85							7.9	7.7	7.3	7.3	85
90							7.1	6.9	6.5	6.5	90
95								6.2	5.9	5.9	95
100								5.7	5.2	5.2	100
105									4.7	4.7	105
110									4.2	4.2	110
115									3.7	3.7	115
120										3.3	120

t_201_00021_00_000

Lifting heights
Hauteurs de levage

T

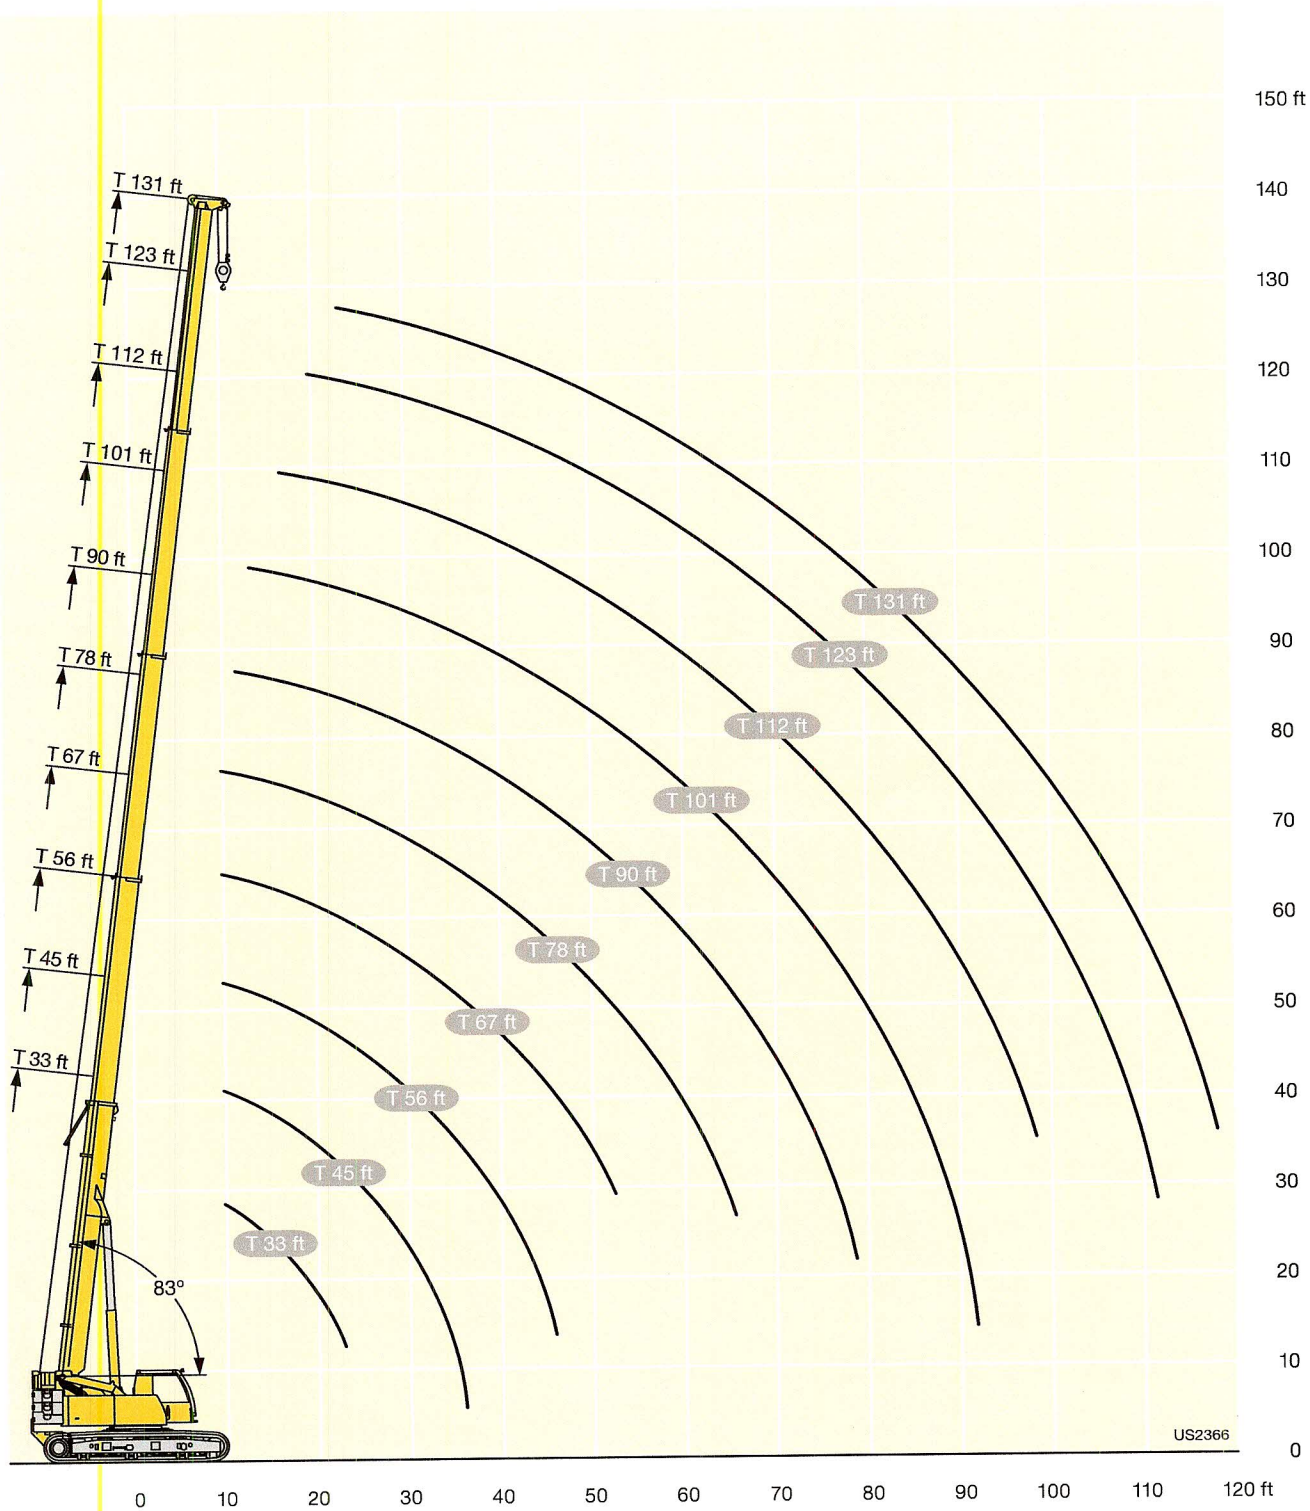

Lifting capacities Forces de levage


TK

		33 – 131 ft			31 ft			360°			34400 lbs			22050 lbs			75%			Preliminary Préliminaire				
	ft	33 ft			90 ft			101 ft			112 ft			123 ft			131 ft				ft			
		31 ft			31 ft			31 ft			31 ft			31 ft			31 ft							
		0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°					
9		17.6																				9		
10		17.4																				10		
11		17.1																				11		
12		16.7																				12		
13		16.3																				13		
14		15.9			18.5																	14		
15		15.5			18.5																	15		
16		15.1	14.8		18.5																	16		
17		14.8	14.7		18.5																	17		
18		14.4	14.5		18.5			18.5														18		
20		13.7	14.2		18.4			18.5														20		
22		13	13.7	11.5	18.1			18.4			16.1											22		
24		12.3	13.2	11.5	17.7			18.2			16											24		
26		11.6	12.7	11.4	17.3	14.8		17.8			15.9			13.4			12.1					26		
28		10.9	12.1	11.3	16.9	14.8		17.5	14.8		15.8			13.4			12.1					28		
30		10.2	11.6	11.1	16.5	14.8		17.2	14.8		15.7			13.3			12					30		
32		9.5	11	10.9	16.1	14.6	11.5	16.8	14.7		15.5	13.8		13.3			12					32		
34		8.9	10.4	10.5	15.7	14.5	11.5	16.4	14.5		15.4	13.6		13.2			11.9					34		
36		8.3	9.7	10	15.3	14.3	11.5	16.1	14.2		15.2	13.4		13.1			11.8					36		
38		7.7	9.1	9.5	14.9	14	11.5	15.7	14	11.5	15.1	13.2		13	12		11.7	11.2				38		
40		7.2	8.5	9	14.5	13.8	11.5	15.3	13.7	11.5	14.9	13		12.8	11.9		11.5	11.1				40		
45		6.1	7.4	7.7	13.5	13.2	11.3	14.4	13.2	11.5	14.5	12.6	11.2	12.3	11.6	10.7	11.2	10.8	10.2			45		
50					12.6	12.5	11.1	13.5	12.7	11.2	13.9	12.2	10.9	11.7	11.1	10.4	10.7	10.1	9.7			50		
55					11.7	11.8	10.8	12.6	12.2	10.9	13.3	11.8	10.6	11.2	10.6	10	10.1	9.5	9.1			55		
60					10.7	11	10.4	11.8	11.7	10.6	12.6	11.5	10.4	10.7	9.9	9.6	9.4	8.9	8.7			60		
65					9.8	10.3	9.8	11	11.1	10.3	11.6	11.1	10.1	10.1	9.2	9	8.9	8.5	8.4			65		
70					9	9.4	9.2	10.1	10.4	9.8	10.3	10.6	9.8	9.5	8.8	8.6	8.5	8.2	8			70		
75					8.2	8.7	8.6	9.3	9.7	9.3	9.1	9.7	9.4	8.9	8.4	8.3	8.1	7.8	7.7			75		
80					7.4	8.1	8	8.5	8.9	8.8	8.2	8.6	8.8	8.2	8	8	7.7	7.5	7.4			80		
85					6.8	7.6	7.4	7.7	8	8.2	7.8	7.7	7.9	7.4	7.7	7.7	7.2	7.2	7.2			85		
90					6.2	7		7.1	7.3	7.5	7.1	7.2	7.4	6.7	7	7.2	6.5	6.8	6.9			90		
95					5.7	6.4		6.6	6.7		6.4	6.7	6.8	6	6.3	6.6	5.9	6.3	6.4			95		
100					5.1			6.1	6.3		5.8	6.1		5.4	5.7	5.9	5.3	5.6	5.9			100		
105					4.5			5.5	5.7		5.3	5.5		4.8	5.1	5.3	4.7	5	5.3			105		
110								5	5.2		4.8	5		4.3	4.6		4.2	4.5	4.7			110		
115											4.3	4.5		3.8	4.1		3.7	4				115		
120											3.9			3.4	3.6		3.3	3.6				120		
125											3.5			3	3.2		2.9	3.1				125		
130														2.6	2.8		2.6	2.8				130		
135														2.3			2.2	2.4				135		
140																	1.9					140		
145																	1.7					145		

t_201_00141_00_000 / 00161_00_000 / 00181_00_000

Lifting capacities Forces de levage

TK



Preliminary
Préliminaire

	Preliminary																		
	33 ft			90 ft			101 ft			112 ft			123 ft			131 ft			
	52 ft			52 ft			52 ft			52 ft			52 ft			52 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	
13	8.9																		13
14	8.8																		14
15	8.8																		15
16	8.7																		16
17	8.5																		17
18	8.4			9															18
20	8.2			9															20
22	7.9			9			9												22
24	7.7			9			9												24
26	7.4	7.1		9			9			8.3									26
28	7.2	7		8.9			9			8.3			7.3			6.8			28
30	7	6.8		8.8			8.9			8.2			7.3			6.8			30
32	6.9	6.7		8.6			8.8			8.1			7.2			6.7			32
34	6.7	6.5		8.5			8.7			8.1			7.2			6.7			34
36	6.5	6.4		8.3	7.2		8.6			8			7.2			6.7			36
38	6.3	6.2	4.9	8.2	7.1		8.5	7.1		7.9			7.1			6.6			38
40	6.1	6.1	4.8	8.1	7		8.3	7		7.9			7.1			6.6			40
45	5.7	5.8	4.7	7.7	6.7		8	6.8		7.7	6.5		6.9			6.5			45
50	5.2	5.5	4.6	7.3	6.5	4.9	7.6	6.6		7.4	6.4		6.8	6		6.4	5.7		50
55	4.7	5.1	4.5	7	6.3	4.8	7.3	6.4	4.8	7.2	6.2	4.8	6.7	5.9		6.3	5.7		55
60	4.2	4.8	4.4	6.8	6.1	4.7	7	6.2	4.8	7	6	4.8	6.6	5.8		6.2	5.6		60
65	3.7	4.5	4.2	6.5	5.9	4.7	6.8	6	4.7	6.8	5.9	4.8	6.4	5.6	4.8	6.1	5.5	4.8	65
70				6.2	5.7	4.6	6.6	5.8	4.7	6.6	5.7	4.7	6.3	5.5	4.7	6	5.4	4.8	70
75				5.9	5.6	4.6	6.3	5.6	4.6	6.4	5.6	4.7	6.1	5.4	4.7	5.9	5.3	4.7	75
80				5.7	5.4	4.5	6	5.5	4.6	6.3	5.4	4.6	6	5.3	4.6	5.7	5.2	4.7	80
85				5.4	5.3	4.5	5.8	5.4	4.5	6.1	5.3	4.6	5.8	5.2	4.6	5.6	5.1	4.6	85
90				5.1	5.1	4.4	5.5	5.3	4.5	5.9	5.2	4.5	5.7	5.1	4.6	5.5	5	4.6	90
95				4.8	4.9	4.3	5.3	5.1	4.4	5.6	5.1	4.5	5.5	5	4.5	5.4	4.9	4.6	95
100				4.5	4.8	4.3	5	5	4.4	5.4	5	4.4	5.3	5	4.5	5.2	4.9	4.5	100
105				4.2	4.7	4.2	4.7	4.8	4.3	5.1	5	4.4	5.1	4.9	4.5	5	4.8	4.5	105
110				3.9	4.7	4.1	4.4	4.7	4.2	4.9	4.9	4.3	4.6	4.8	4.4	4.5	4.7	4.5	110
115				3.6	4.6		4.1	4.5	4.1	4.5	4.7	4.3	4.1	4.6	4.3	4	4.5	4.4	115
120				3.3	4.4		3.8	4.3	4	4.2	4.5	4.2	3.7	4.2	4.2	3.6	4.1	4.3	120
125				3.1	3.9		3.6	4.2	3.9	3.8	4.1	4.1	3.3	3.7	4	3.2	3.7	4	125
130							3.3	3.9		3.4	3.7	3.8	2.9	3.3	3.6	2.9	3.3	3.5	130
135							3.1			3.1	3.3		2.6	2.9	3.1	2.5	2.9	3.1	135
140										2.8	3		2.3	2.6	2.7	2.2	2.5	2.7	140
145										2.5	2.7		2	2.3	2.4	1.9	2.2	2.4	145
150													1.7	2		1.7	1.9	2	150
155													1.5	1.7		1.4	1.6		155
160																1.4			160

t_201_00201_00_000 / 00221_00_000 / 00241_00_000

Lifting heights Hauteurs de levage

TK

